


# Yucel 12V Batteries

## General Purpose, 12VDC Lead-Acid Batteries

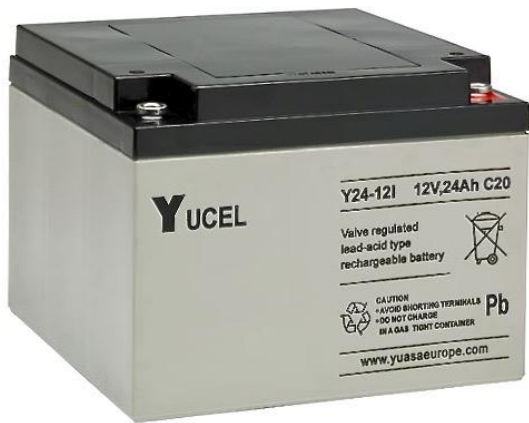

- General Purpose VRLA batteries
- Operate in any orientation
- EUROBAT Classification
- Superior Life Lead-Calcium Grids

This family of Yucel 12VDC rechargeable batteries from the renowned Yuasa Company, has been selected by Dycon as it complements the advanced features of Dycon's extensive range of power supplies, features that include low voltage cut-off, to avoid battery deep discharge and, on the 'Intelligent' range, full battery impedance checks to give prior warning of impending battery problems. The range provides reliable standby power from 2.1Ah, 7Ah, 17Ah to 24Ah, suitable for all intruder, access control, fire, CCTV and building management systems. The 24Ah versions are ideal for supplying the higher power needed for larger access control and EN50131 Grade 4 intruder systems. For 24VDC systems and usage, connect 2 x 12VDC versions together, please note that 24 volt PSU's need 2 x 12VDC batteries. For example, a 24VDC 7A battery back-up requires 2 x 7 Ampere batteries. To save time and having to source from different suppliers, Dycon can package and deliver any of its power supplies complete with a suitable battery from this range. All you need to do is select your power supply, decide which battery suits your needs and just contact Dycon Sales.

# General Purpose Standby Batteries

## 12 VDC - 2.1Ah, 7Ah, 17Ah and 24Ah Lead Acid Batteries

### Technical Specifications

SPECIFICATION	BAT004	BAT003	BAT005	BAT006
Nominal Voltage	12VDC	12VDC	12VDC	12VDC
Amperage (Ah)	2.10	7.00	17.00	24.00
20 Hour rate capacity to 10.5V at 25° C	2.10	7.00	17.00	24.00
10 Hour rate capacity to 10.8V at 25° C	1.90	6.40	15.70	22.00
Length (mm)	178	151	181.5	166
Width (mm)	34	65	77	175
Height over terminals (mm)	64	94.5	167.5	125
Weight (kg)	0.82	2.45	5.70	9.00
Terminal Type	Faston 4.75	Faston 4.75	M5	M5

ALL VERSIONS	
Operating temperature Discharge	-20° to +60°C
Operating temperature charge	-15° to +50°C
Storage temperature, fully charged	-20° to +60°C
Capacity loss % per month in storage at 20°C	3%
Case material	ABS (UL94:HB)
Charge voltage at 20°C	13.65V
Design life at 20°C	3 to 5 years
3 <sup>rd</sup> Party Certifications	UL™, BSI™, VDS™
Installation Information	Batteries can be fitted in any configuration except permanently inverted.
Recycling Information	These batteries must be recycled at the end of life in accordance with local and national laws and regulations.

**Note, Dycon smart PSU's do not support the BAT004 12VDC 2.1 A due to its advanced impedance battery testing. For example, D1532, D1460, D2431, D2433, D2435 require 7 Ampere or higher.**

**Dycon Power Solutions Ltd**  
Unit A, Cwm Cynon Business Park, Mountain Ash,  
CF45 4ER, United Kingdom.

**For more information about the Dycon products:**  
[www.dyconpower.com](http://www.dyconpower.com)

**Or to discuss your specific needs:**  
+44 (0)1443 471 900



Dycon leads the security and associated power supply markets, with UK design and manufacture of advanced power products, engineered to provide high quality, cost-effective solutions to meet current regulations and the specific needs of system integrators and end-users.

Batteries data sheet 020520202 V7