


D1501

General Purpose, Switched-Mode, 13.8VDC 1A Power Supply with battery charging

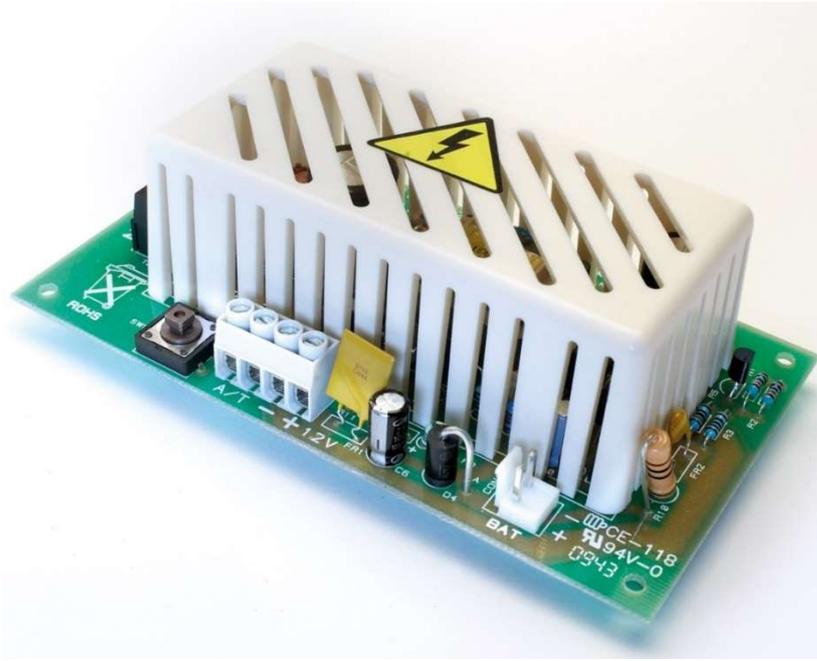

- Efficient switched-mode design
- LED Power indicator
- Battery charging for 2.1 and 7/8 Ah sealed lead acid battery
- Protected against electrical 'spikes'
- Battery deep discharge cut off protection
- Over-voltage cut out and electronic PTC fuse
- Spring tamper on PCB

Dycon's D1501 is a low cost 1 Amp switched-mode power supply capable of charging a range of sealed lead acid/gel batteries. The advanced switched-mode design means that they consume far less electricity than conventional linear units.

D1501 power supplies are protected against electrical 'spikes' and also features over-voltage cut-out and battery deep-discharge cut off. A single LED power indicator is included for visual verification of the correct operation, this can be remotely indicated outside the housing using the 2-pin connector provided on the PCB.

The unit is available as a PCB only or fitted in a range of Dycon housings in various sizes. These include the D1501-W IP65 rated outdoor version, that will accept a range of battery types including 2.1 and 7 or 8Ah batteries. The D1501-D is suitable for use in standard DIN-Rail NS32-G and N35 7.5/15mm DIN-Rail cabinets and racks.



DYCON
power solutions

General Purpose Switched-Mode Power Solutions

13.8VDC 1A Power Solution

Specifications

Power Supply	Type A, Ungraded, Environmental Class 2
Voltage Input	230VAC +10% -15%; 50Hz \pm 15%
AC Input Current	200mA @230VAC
AC Input Fuse	1A Fixed
Output Voltage with AC Power	13.8VDC nominal
Output Ripple	< 100mV peak-to-peak at full rated output
Maximum Output Current at Full Load	1A
Suitable Battery	2.1Ah, 7 or 8Ah sealed lead acid or gel rechargeable VRLA
Battery Charging Current and Voltage	300mA at 13.7Vdc float charge voltage
Battery cable	Included 300 mm length with Faston 4.75mm connectors
Maximum Over-Voltage Cut-Out	14.4VDC \pm 3%
Output fuse	Electronic PTC fuse, self-resetting when fault is removed.
Tamper (only if supplied in housing)	On-board front tamper with Spring and PCB connector
Battery Deep Discharge Voltage Limit	10VDC \pm 3% with auto cut off for battery protection
LED indication	1 x Green LED 'Power Good'.
External LED connection	1 x Jumper-style 2-pin connector for 'Power Good' indication.
Operating Temperature Range	-10°C to +40°C
Humidity	95% non-condensing

Part Number	Description	Size l x w x d	Weight
D1501-A	1A power supply in white steel A-box	168mm x 238mm x 90mm	1.30kg
D1501-B	1A power supply in white steel B-box	315mm x 260mm x 90mm	2.10kg
D1501-C	1A power supply in white steel C-box	425mm x 345mm x 90mm	3.50kg
D1501-W	1A power supply in an IP65 weatherproof housing	245mm x 195mm x 90mm	1.2kg
D1501-D	1A power supply supplied in a DIN-Rail cradle	134mm x 90mm x 70mm	0.25kg
D1501-P	1A power supply PCB module	130mm x 72mm x 38mm	0.19kg

Dycon Power Solutions Ltd

Unit A, Cwm Cynon Business Park, Mountain Ash,
CF45 4ER, United Kingdom.

For more information about the Dycon products:

website: www.dyconpower.com

email: sales@dyconpower.com

Or to discuss your specific needs:

+44 (0)1443 471 900



Dycon leads the security and associated power supply markets, with UK design and manufacture of advanced power products, engineered to provide high quality, cost-effective solutions to meet current regulations and the specific needs of system integrators and end-users.

D1501 data sheet 10062020 V10